

Q-SUN solar

Mercury Series

Mono-Crystalline
630~650W

0~+5W POWER TOLERANCE

- High efficiency N - type Double glass module
- Stronger properties, PID resistance, reduced hot spot loss
- Higher module power, lower BOS costs
- Harsh environmental adaptation
- Bifacial module, more power generation

15 years material warranty **15**

30 years power linear warranty **30**

156

HALF-CUT
CELLS

182
x183.75
mm

RECTANGULAR
CELLS

**Comprehensive quality management system
and product certification**

IEC 61215-1:2021, EN IEC 61215-1:2021/AC:2021

IEC 61215-1-1:2021, EN IEC 61215-1-1:2021

IEC 61215-2:2021, EN IEC 61215-2:2021, IEC 61730-1:2023, IEC 61730-2:2023

ISO9001:2015: Quality management system

ISO14001:2015: Environmental management system

ISO45001:2018: Occupational health and safety management system



23.3%

MAXIMUM CONVERSION

0~+5W

POWER TOLERANCE


0.4%

0.4% PER YEAR OVER 30 YEARS

Half-Cut Module

LOWER TEMPERATURE COEFFICIENT

Mechanical Diagrams

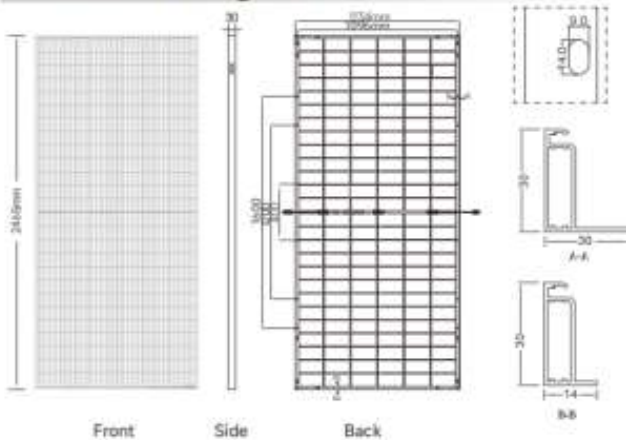

Length: ±2mm Width: ±2mm Thickness: ±1mm Hole pitch: ±2mm

Packing Standard

Container capacity(40HQ)

Pallet size (mm) 37pcs/pallet,16pallets/ctns, 592pcs/ctn

Electrical Parameters At BNPI

Maximum Power (Pmax)	695	700	706	711	717
Open Circuit Voltage (Voc)	56.04	56.26	56.33	56.44	56.52
Short Circuit Current (Isc135)	15.69	15.75	15.82	15.88	15.94
Maximum Power Voltage (Vmp)	47.58	47.78	47.98	48.17	48.36
Maximum Power Current (Imp)	14.60	14.65	14.71	14.76	14.82
Short Circuit Current (Isc300)	17.47	17.54	17.62	17.69	17.76

Electrical Parameters

Module Type	QN-630HT-06		QN-635HT-06		QN-640HT-06		QN-645HT-06		QN-650HT-06	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax)	630	476	635	480	640	484	645	488	650	491
Open Circuit Voltage (Voc)	56.04	55.24	56.26	55.45	56.33	55.66	56.44	55.66	56.52	55.70
Short Circuit Current (Isc)	14.23	11.38	14.29	11.43	14.34	11.48	14.40	11.53	14.46	11.57
Maximum Power Voltage (Vmp)	47.58	44.96	47.78	45.35	47.98	45.34	48.17	45.53	48.36	45.70
Maximum Power Current (Imp)	13.24	10.59	13.29	10.63	13.34	10.67	13.39	10.71	13.44	10.75
Module Efficiency -ηm (%)	22.6		22.7		22.9		23.1		23.3	

Load Capacity

Max Load Front	5400Pa
Max Load Back	2400Pa
Through Hole Testing	25mm Diameter, Impact Speed 23m/s

Temperature Coefficient (STC Test)


Temperature Coefficient of Isc	+0.04%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Pmax	-0.29%/°C

STC: Irradiance:1000W/m² | Battery temperature: 25°C | Atmospheric=1.5

NOCT: Irradiance:800W/m² | Ambient temperature: 20°C | Atmospheric=1.5 | Wind speed 1m/s


BNPI: Rear Irradiance 135W/m² | Bifaciality coefficient 80%±5%

Curve Figure

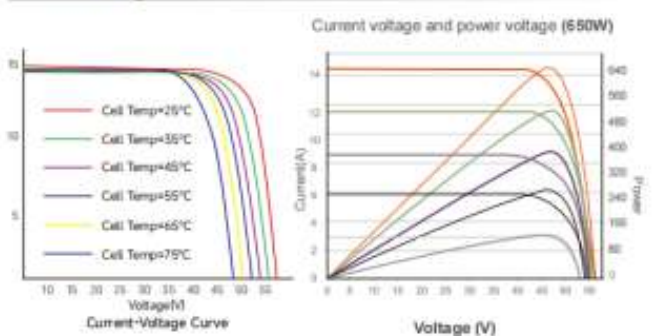

Specification

Cell Type	mono crystalline 16BB
No. of Cells	156 [2x(6x13)] pcs
Dimension	2465x1134x30mm
Weight	33.7kg
Front Glass	2.0 mm
Back Glass	2.0 mm
Junction Box	IP68
Cable Length	300mm,1200mm(can be customized)

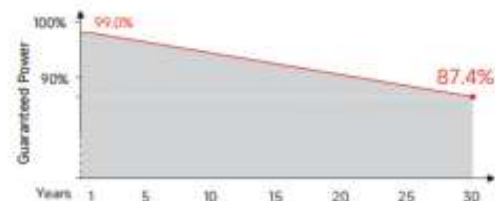

Operation Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500VDC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+5W
Nominal Operating Cell Temperature (NOCT)	42±2°C
Safety Class	Class II
Refer.Bifacial Factor	80±10%

D5 Greenland Window Building
Nonghua Road
Yuhuatai District, Nanjing, China
www.q-sunsolar.com

